

clear ahead

Speed · Innovation · Performance


PEN CRUISE

flex[®]
DIMENSION-POLYANT.COM



FLEX[®] PEN CRUISE

DIMENSION-POLYANT's FLEX[®] line stands for "Fill Laminate Extra X". The FLEX[®] range of fabrics is suited to racing and cruising sails. Foundations of all FLEX[®] laminate constructions are strong fill and warp yarns. Additional 20° and 30° "Double X" patterns from the fill absorb multiple load situations. Thanks to its novel construction, FLEX[®] handles strain in six different directions, resulting in unprecedented shape retention characteristics. In addition to primary loads, off-angle loads in clew, head and tack areas, mid leech and luff are catered for. FLEX[®] will also absorb those dynamic loads that occur during sailing and enables excellent shape control. FLEX[®] styles are crosscut fabrics and available with several fibre densities which can be combined in a sail in accordance with the expected load situation. FLEX[®]'s firmly locked-up fiber matrix guarantees long performance life and superior durability.



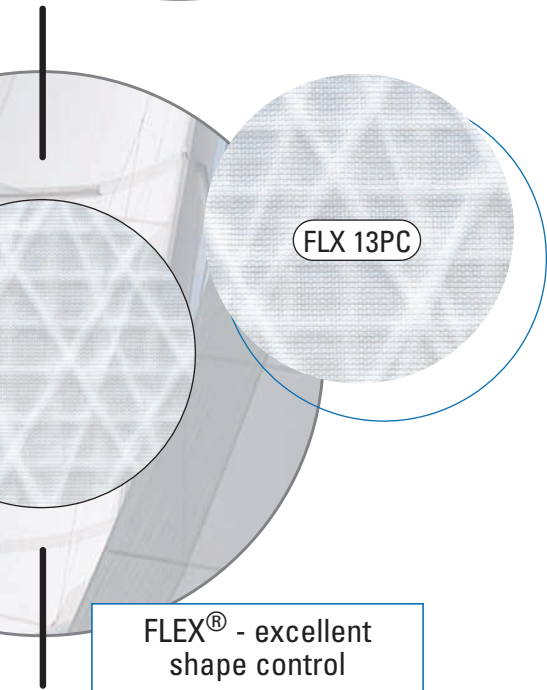

FLEX® - excellent shape control

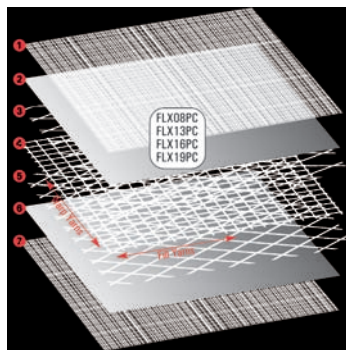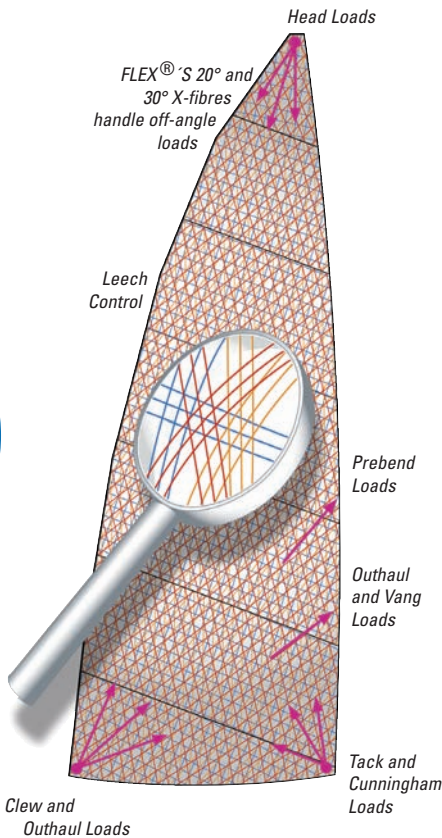

- Multi-directional load handling – 0° Warp/90° Fill, double 20° yarns, and double 30° yarns means FLEX® handles load in six directions
- Leech stability – FLEX®'s double “X”s handle mid-leech loads of high- and low-aspect mains and genoas
- Tear strength – Strong, durable fill and warp yarns make FLEX® a tough, durable material
- Maximum draft position – Multi-directional yarn layout addresses stability in draft position
- Step-up construction – Progressive weights in each FLEX® line allow step-up construction
- Ease of construction – FLEX®'s two extra “X”s means there’s no need to flip-flop panels – and a FLEX® sail has fewer panels than other cross-cut products
- Sail weight reduction – FLEX® has the ability to split weights from high-load to low-load areas

1. Anti-microbial taffeta for chafe protection and resistance to mildew
2. PET film with SPF+ UV inhibitor for low load stability and UV protection
3. 20° Yarns handle off-angle high loads: upper leech, head, tack, and clew
4. 30° Yarns handle off-angle low loads: mid-leech, prebend, boom vang
5. Fill/Warp Yarns handle primary loads, add breaking strength and durability
6. PET film with SPF+ UV inhibitor for low load stability and UV protection
7. Anti-microbial taffeta for chafe protection and resistance to mildew



sailcloth technology

DIMENSION-POLYANT GmbH, Germany Headquarters

Speefeld 7
D-47906 Kempen
Phone: +49 (2152) 891 0
Fax: +49 (2152) 891 149
info@dimension-polyant.com

DIMENSION-POLYANT SAS, France

Rue Newton
Parc Technologique
F-17000 La Rochelle
Phone: +33 (0) 546 282 201
Fax: +33 (0) 546 412 840
larochelle@dimension-polyant.com

DIMENSION-POLYANT SAS, France

Port de la Pointe Rouge
F-13008 Marseille
Phone: +33 (0) 491 736 628
Fax: +33 (0) 491 722 505
marseille@dimension-polyant.com

DIMENSION-POLYANT UK Ltd., United Kingdom

Unit 11, Kingdom Close
Kingdom Business Park
Segensworth East
GB-Fareham Hampshire PO15 5TJ
Phone: +44 (1489) 570 551
Fax: +44 (1489) 570 451
uk@dimension-polyant.com

DIMENSION-POLYANT Inc., USA

78, Highland Drive
USA-Putnam CT 06260
Phone: +1 (860) 928 8300
Fax: +1 (860) 928 8330
info@us.dimension-polyant.com

DIMENSION-POLYANT Sailcloth PTY Ltd., Australia

P.O. Box 825
Unit 7/9 Powells Rd.
AUS-Brookvale N.S.W. 2100
Phone: +61 (2) 9905 9565
Fax: +61 (2) 9905 9569
dp-aus@dimension-polyant.com

Name	Warp/Fill	X-PLY 30 degree	X-PLY 20 degree
FLX 13 PC	4 x 4 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 16 PC	5 x 6 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 19 PC	5 x 7 1,000 P x 1,300 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 24 PC	6 x 6 1,000 P x 1,300 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN

3 x 3 1,300 is 3,900 DPI to each side or 7,800 DPI
2 x 2 1,300 is 2,600 DPI to each side or 5,200 DPI
Light taffeta on both sides.